



# ABS1-12~ABS10-12

## Surface Mount Glass Passivated Bridge Rectifiers

### Features

- Glass Passivated Chip Junction
- Reverse Voltage - 100 to 1000 V
- High Surge Current Capability
- Designed for Surface Mount Application

### ABS/LBF



- 1.Input Pin(~)      2.Input Pin(~)  
3.Output Anode(+)    4.Output Cathode (-)

### Marking Code:

ABS1-12: 12T1  
ABS2-12: 12T1  
ABS4-12: 12T1  
ABS6-12: 12T1  
ABS8-12: 12T1  
ABS10-12: 12T1

### Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	ABS1-12	ABS2-12	ABS4-12	ABS6-12	ABS8-12	ABS10-12	Units
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	100	200	400	600	800	1000	V
Average Rectified Output Current at $T_C = 125^\circ\text{C}$	$I_O$	1.2						A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	$I_{FSM}$	40						A
Maximum Instantaneous Forward Voltage at 1.2A	$V_F$	1.1						V
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_A = 25^\circ\text{C}$ $T_A = 125^\circ\text{C}$	$I_R$	5 100						$\mu\text{A}$
Typical Junction Capacitance <sup>Note1</sup>	$C_j$	18						pF
Typical Thermal Resistance <sup>Note2</sup>	$R_{\theta JA}$ $R_{\theta JC}$	70 18						$^\circ\text{C}/\text{W}$
Junction Temperature	$T_J$	150						$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-55 to +150						$^\circ\text{C}$

### Note:






1. Measured at 1 MHz and applied reverse voltage of 4 V D.C
2. Mounted on glass epoxy PC board with 4×1.5"×1.5" (3.81×3.81 cm) copper pad.



# ABS1-12~ABS10-12

## Surface Mount Glass Passivated Bridge Rectifiers

### Typical Characteristic Curves

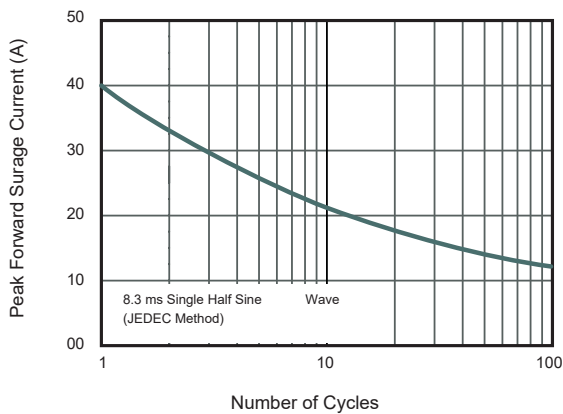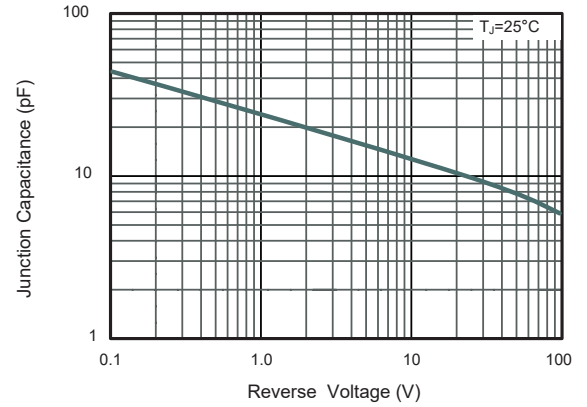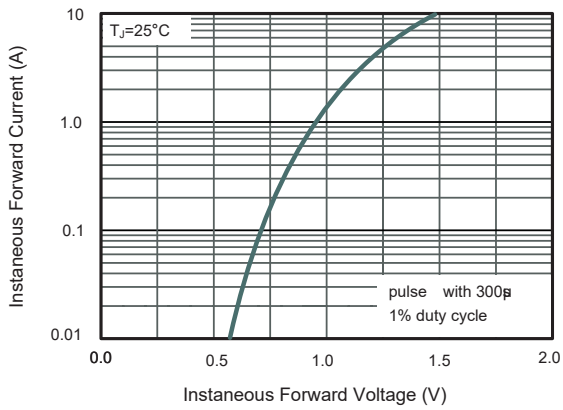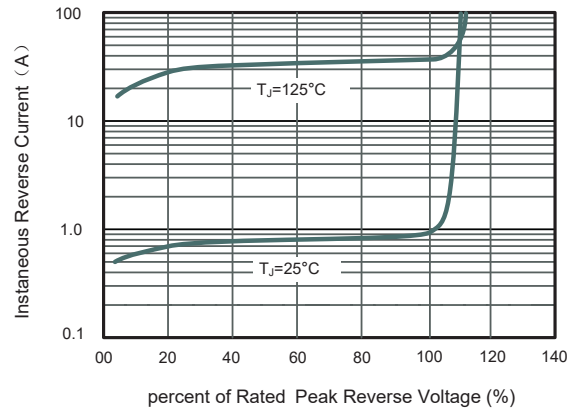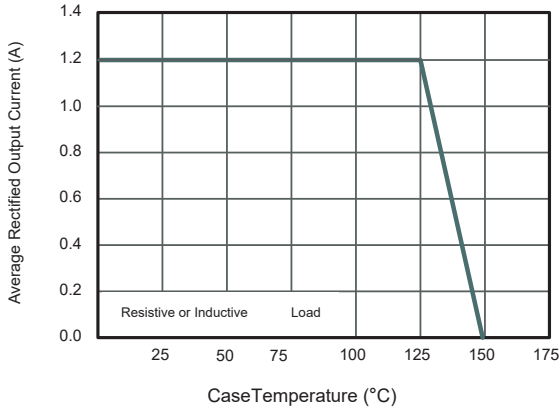




# ABS1-12~ABS10-12

## Surface Mount Glass Passivated Bridge Rectifiers

### Package Outline

ABS/LBF

Dimensions in mm

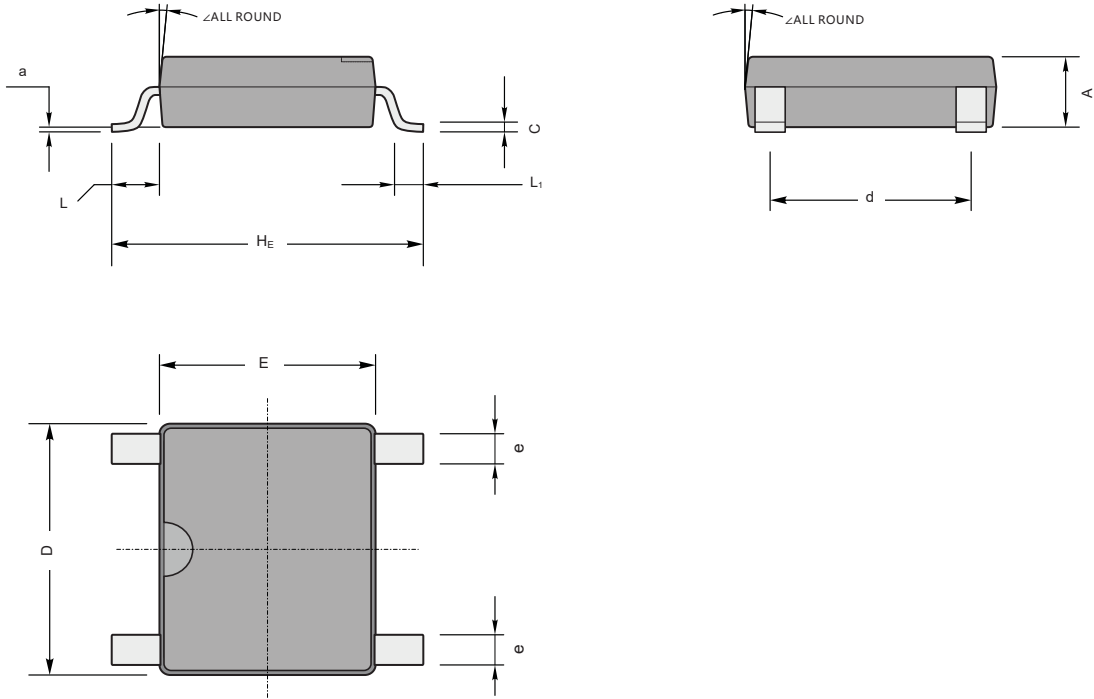

ABS/LBF mechanical data

UNIT		A	C	D	E	H <sub>E</sub>	d	e	L	L <sub>1</sub>	a	∠
mm	max	1.5	0.22	5.2	4.5	6.4	4.2	0.7	0.95	0.6	0.2	7°
	min	1.3	0.15	4.9	4.2	6.0	3.8	0.5				
mil	max	59	8.7	205	177	252	165	28	37	24	8	
	min	51	5.9	193	166	236	150	20				