




ABS201-PJ~ABS210-PJ

Surface Mount Glass Passivated Bridge Rectifiers

Features

- Glass Passivated Chip Junction
- Reverse Voltage - 100 to 1000 V
- High Surge Current Capability
- Designed for Surface Mount Application

ABS/LBF



- 1.Input Pin(~) 2.Input Pin(~)
3.Output Anode(+) 4.Output Cathode (-)

Marking Code:

ABS201-PJ: ABS201
ABS202-PJ: ABS202
ABS204-PJ: ABS204
ABS206-PJ: ABS206
ABS208-PJ: ABS208
ABS210-PJ: ABS210

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	ABS201-PJ	ABS202-PJ	ABS204-PJ	ABS206-PJ	ABS208-PJ	ABS210-PJ	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	100	200	400	600	800	1000	V
Average Rectified Output Current at $T_C = 115^\circ\text{C}$	I_O	2.0						A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	50						A
Forward Voltage Per Element at $I_F = 2\text{A}$	V_F	1.0						V
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_A = 25^\circ\text{C}$ $T_A = 125^\circ\text{C}$	I_R	5 100						μA
Typical Junction Capacitance ^{Note1}	C_j	25						pF
Typical Thermal Resistance ^{Note2}	$R_{\theta JA}$ $R_{\theta JC}$	60 16						$^\circ\text{C}/\text{W}$
Junction Temperature	T_J	150						$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150						$^\circ\text{C}$

Note:






1. Measured at 1 MHz and applied reverse voltage of 4 V D.C
2. Mounted on glass epoxy PC board with 4×1.5"×1.5" (3.81×3.81 cm) copper pad.



ABS201-PJ~ABS210-PJ

Surface Mount Glass Passivated Bridge Rectifiers

Typical Characteristic Curves

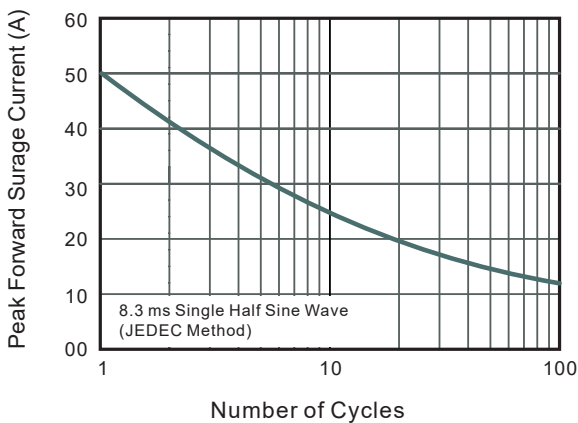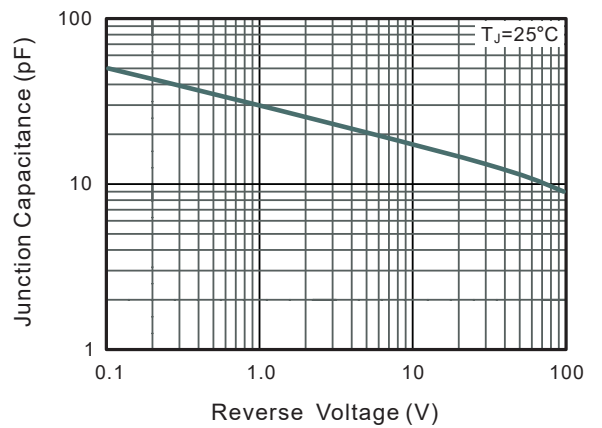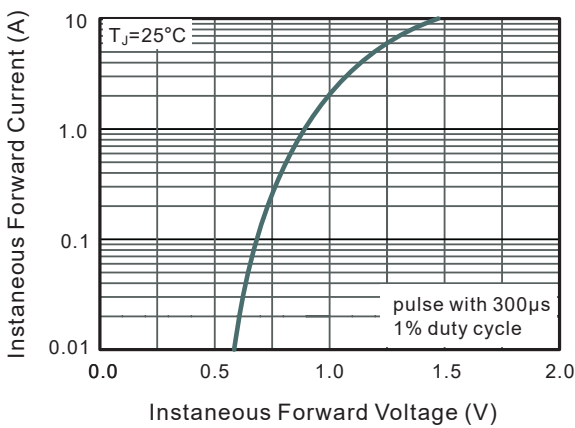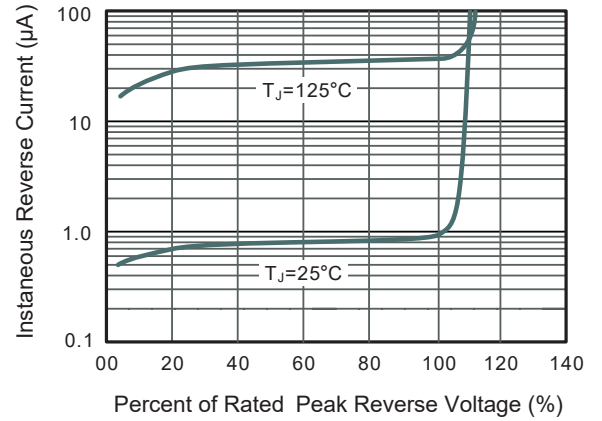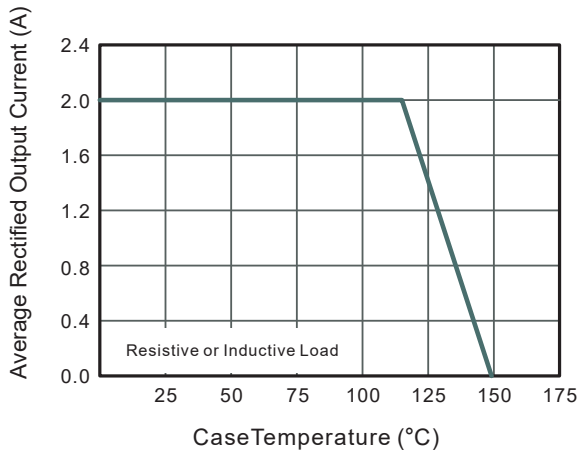




ABS201-PJ~ABS210-PJ

Surface Mount Glass Passivated Bridge Rectifiers

Package Outline

ABS/LBF

Dimensions in mm

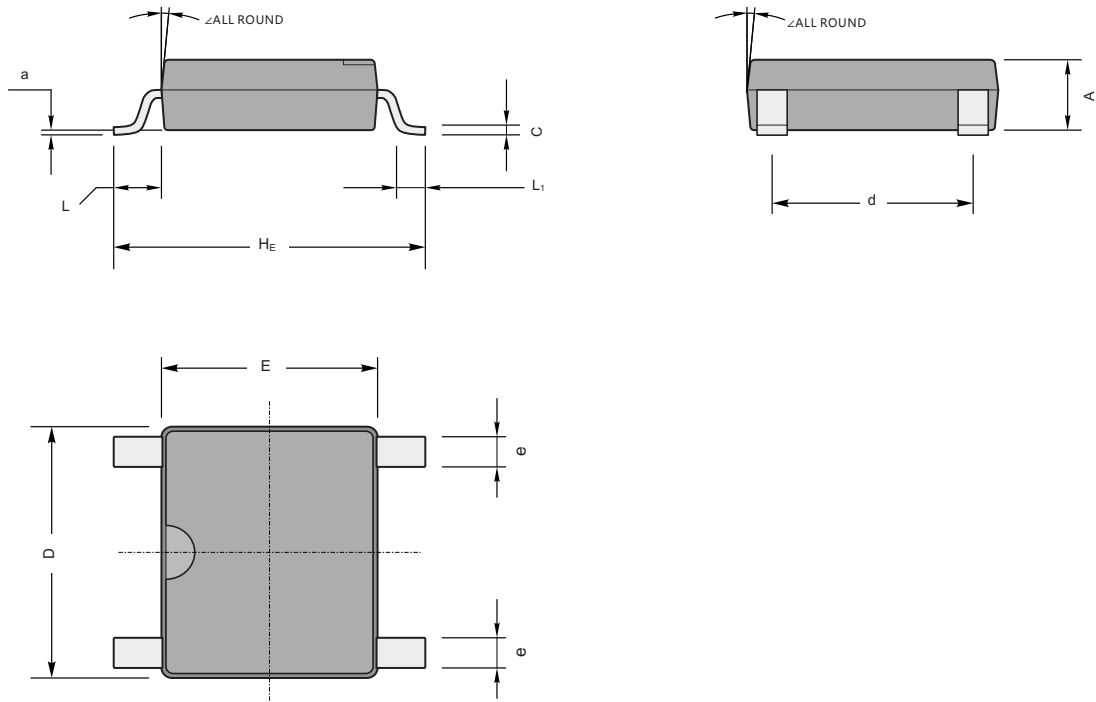

ABS/LBF mechanical data

UNIT		A	C	D	E	H _E	d	e	L	L ₁	a	∠
mm	max	1.5	0.22	5.2	4.5	6.4	4.2	0.7	0.95	0.6	0.2	7°
	min	1.3	0.15	4.9	4.2	6.0	3.8	0.5				
mil	max	59	8.7	205	177	252	165	28	37	24	8	
	min	51	5.9	193	166	236	150	20				