




M20A

Surface Mount General Purpose Silicon Rectifiers

Features

- For surface mount applications
- Glass Passivated Chip Junction
- Low profile package



1.Cathode  2.Anode

Marking Code: M20A

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.






Parameter	Symbols	M20A	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	2000	V
Maximum RMS Voltage	V_{RMS}	1400	V
Maximum DC Blocking Voltage	V_{DC}	2000	V
Maximum Average Forward Rectified Current at $T_C = 100\text{ }^\circ\text{C}$	$I_{F(AV)}$	1	A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	30	A
Maximum Instantaneous Forward Voltage at 1 A	V_F	1.1	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	5 50	μA
Typical Junction Capacitance ^{Note1}	C_j	20	pF
Typical Thermal Resistance ^{Note2}	$R_{\theta JA}$	95	$^\circ\text{C}/\text{W}$
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150	$^\circ\text{C}$

Note:

1. Measured at 1 MHz and applied reverse voltage of 4 V DC.
2. P.C.B. mounted with 0.2" X 0.2" (5 X 5 mm) copper pad areas.



Typical Characteristic Curves

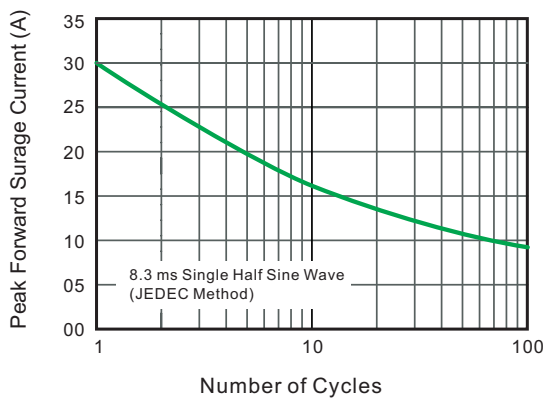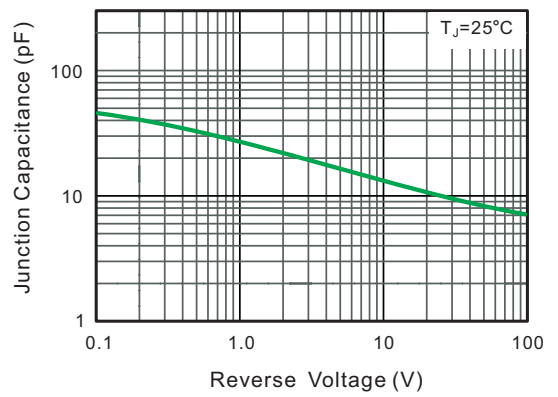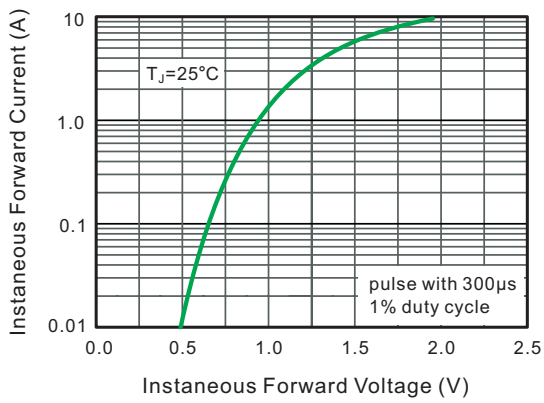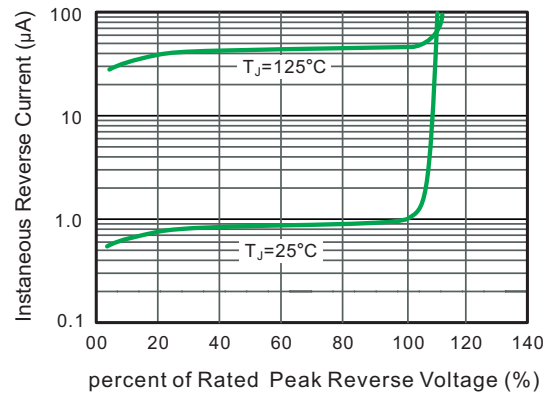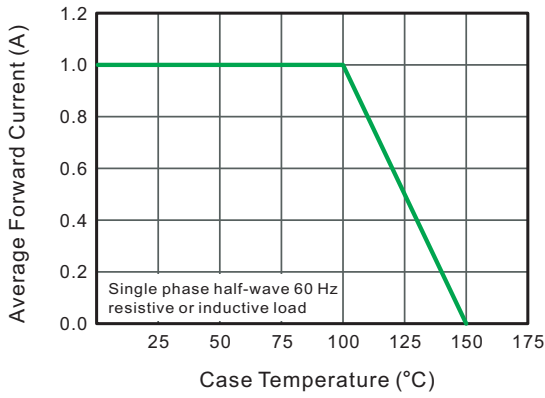




Package Outline

SMA

Dimensions in mm

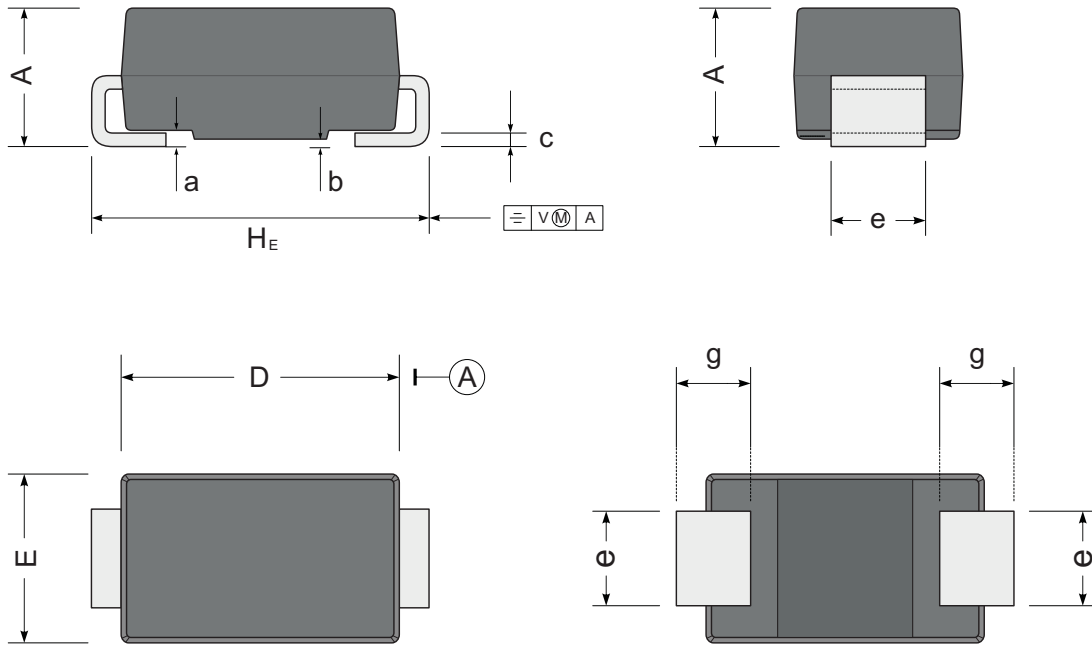

UNIT		A	D	E	H _E	c	e	g	b	a
mm	max	2.2	4.5	2.7	5.2	0.31	1.6	1.5	0.2	0.3
	min	1.9	4.0	2.3	4.7	0.15	1.3	0.9	0.05	
mil	max	87	181	106	205	12	63	59	7.9	12
	min	75	157	91	185	6	51	35	2	