




PJM04DP20SE

P-Channel Enhancement Mode Power MOSFET

Features

- Fast switching
- Low gate charge and $R_{DS(ON)}$
- Low reverse transfer capacitances
- $V_{DS} = -20V, I_D = -4.1A$
 $R_{DS(on)} < 50m\Omega @ V_{GS} = -4.5V$




Making Code: JQ

Applications

- Power management
- Battery powered system
- Load switch and in PWM applications

Schematic Diagram

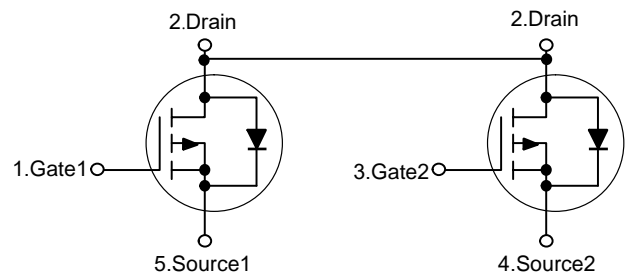

Absolute Maximum Ratings

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Value	Unit
Drain-Source Voltage	$-V_{DS}$	20	V
Gate-Source Voltage	V_{GS}	± 12	V
Drain Current-Continuous	$-I_D$	4.1	A
Drain Current-Pulsed ^{Note1}	$-I_{DM}$	15	A
Maximum Power Dissipation	P_D	1.2	W
Junction Temperature	T_J	150	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C

Thermal Characteristics

Thermal Resistance, Junction-to-Ambient ^{Note2}	$R_{\theta JA}$	104	°C/W
--	-----------------	-----	------



PJM04DP20SE

P-Channel Enhancement Mode Power MOSFET

Electrical Characteristics

(Ta=25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	$-V_{(BR)DSS}$	$V_{GS}=0V, I_D=-250\mu A$	20	--	--	V
Zero Gate Voltage Drain Current	$-I_{DSS}$	$V_{DS}=-20V, V_{GS}=0V$	--	--	1	μA
Gate-Body Leakage Current	I_{GSS}	$V_{GS}=\pm 12V, V_{DS}=0V$	--	--	± 100	nA
Gate Threshold Voltage ^{Note3}	$-V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=-250\mu A$	0.4	0.7	1	V
Drain-Source On-Resistance ^{Note3}	$R_{DS(on)}$	$V_{GS}=-4.5V, I_D=-4.1A$	--	38	50	m Ω
		$V_{GS}=-2.5V, I_D=-3A$	--	51	70	m Ω
Forward Transconductance ^{Note3}	g_{FS}	$V_{DS}=-5V, I_D=-4.1A$	--	6	--	S
Dynamic Characteristics						
Input Capacitance	C_{iss}	$V_{DS}=-4V, V_{GS}=0V, f=1MHz$	--	740	--	pF
Output Capacitance	C_{oss}		--	290	--	pF
Reverse Transfer Capacitance	C_{rss}		--	190	--	pF
Switching Characteristics						
Turn-on Delay Time	$t_{d(on)}$	$V_{DS}=-4V, I_D=-3.3A$ $V_{GEN}=-4.5V, R_G=1\Omega, R_L=1.2\Omega$	--	12	--	nS
Turn-on Rise Time	t_r		--	35	--	nS
Turn-off Delay Time	$t_{d(off)}$		--	30	--	nS
Turn-off Fall Time	t_f		--	10	--	nS
Total Gate Charge	Q_g	$V_{DS}=-4V, I_D=-4.1A,$ $V_{GS}=-4.5V$	--	7.8	--	nC
Gate-Source Charge	Q_{gs}		--	1.2	--	nC
Gate-Drain Charge	Q_{gd}		--	1.6	--	nC
Source-Drain Diode Characteristics						
Diode Forward Voltage ^{Note3}	V_{SD}	$V_{GS}=0V, I_S=-4.1A$	--	--	1.2	V
Diode Forward Current ^{Note2}	I_S		--	--	4.1	A

Note: 1. Repetitive Rating: Pulse width limited by maximum junction temperature.

2.Surface Mounted on FR4 Board, $t \leq 10$ sec.







3.Pulse Test: Pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$



PJM04DP20SE

P-Channel Enhancement Mode Power MOSFET




Typical Characteristic Curves

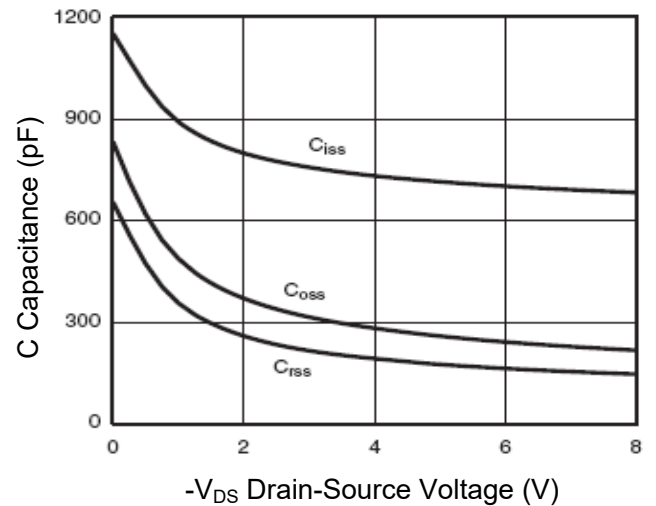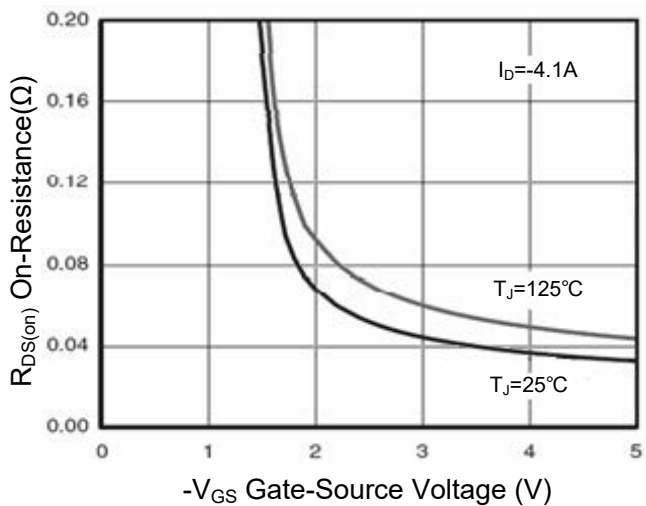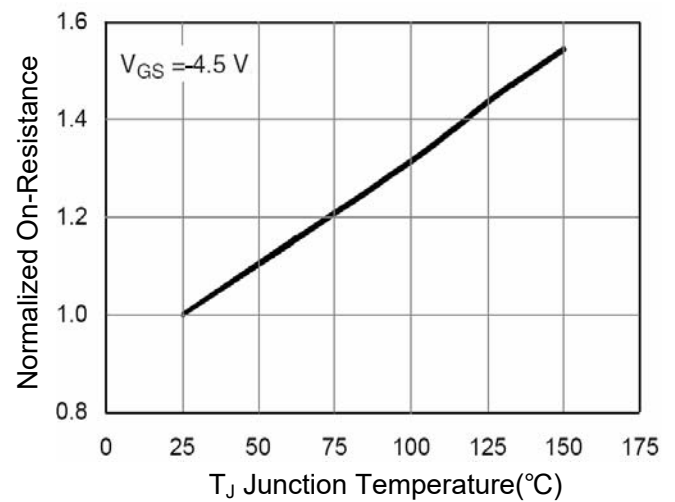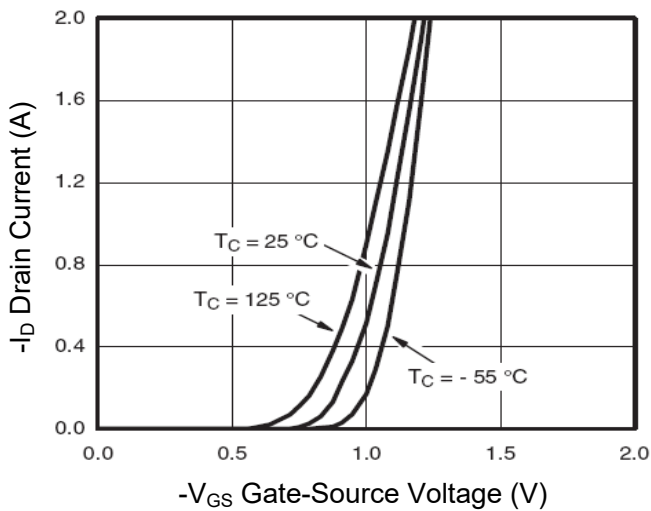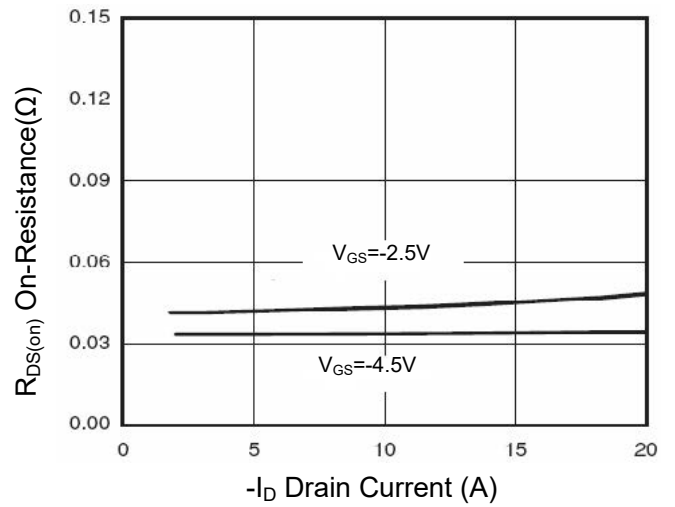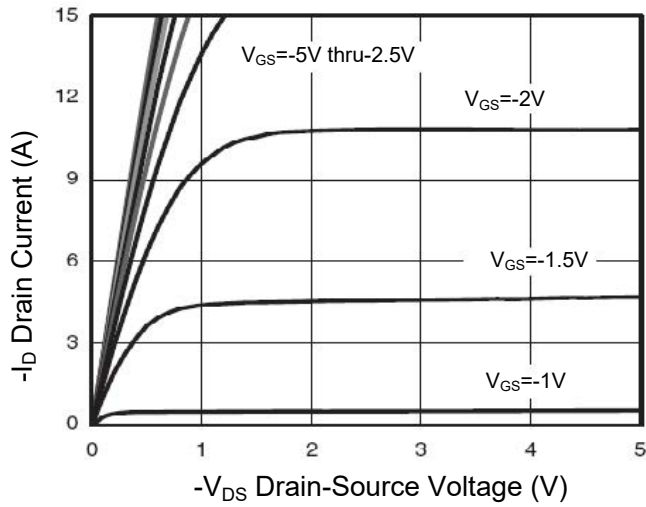



PJM04DP20SE

P-Channel Enhancement Mode Power MOSFET

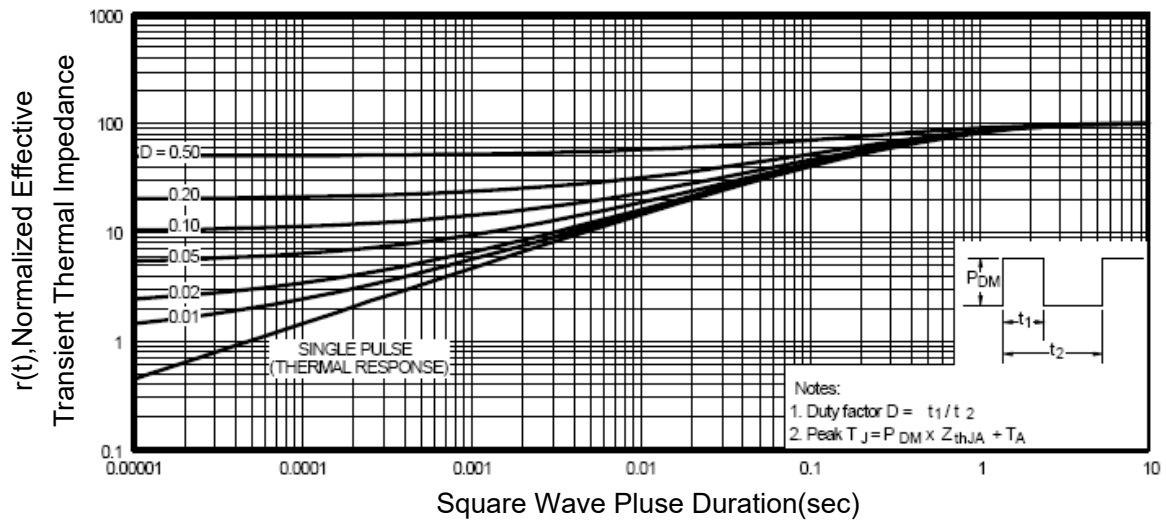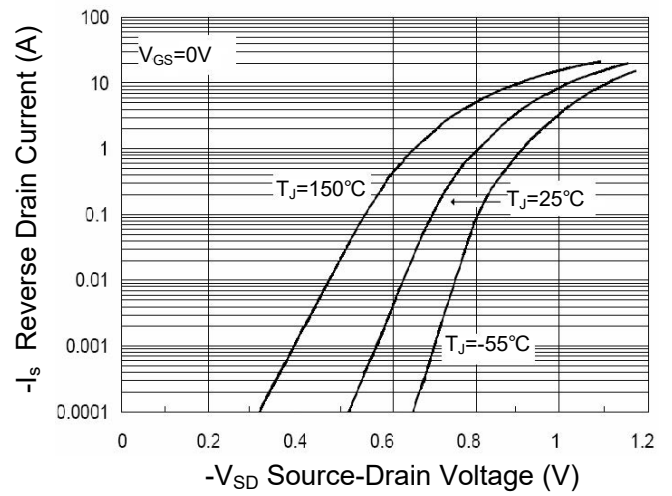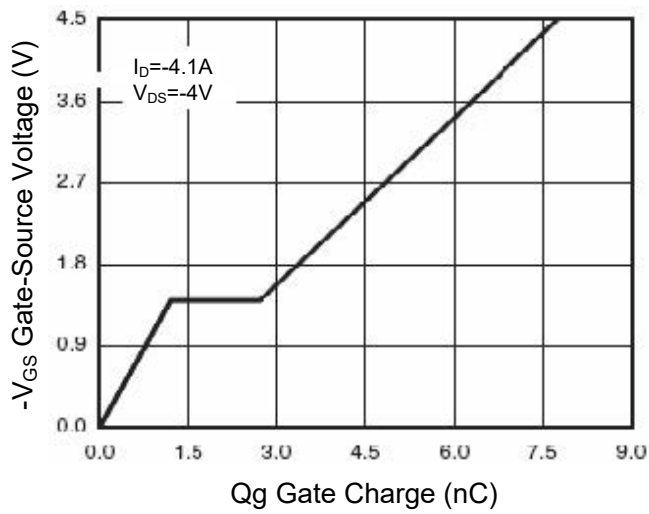






PJM04DP20SE

P-Channel Enhancement Mode Power MOSFET

Package Outline

SOT-23-5

Dimensions in mm

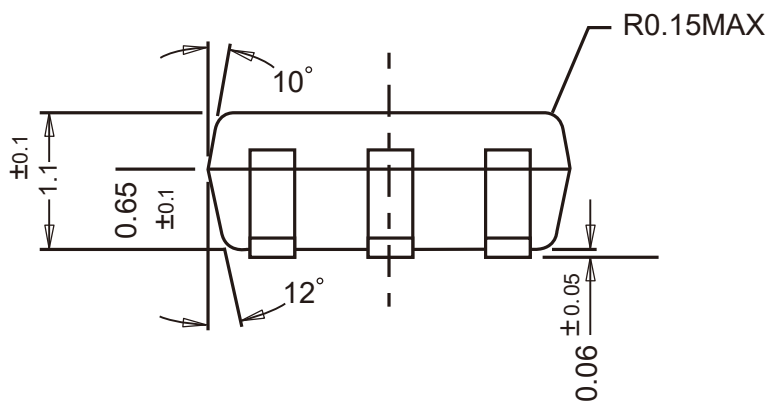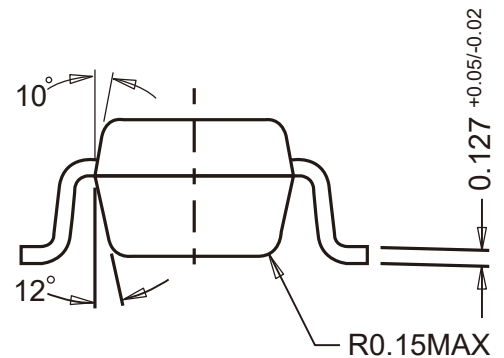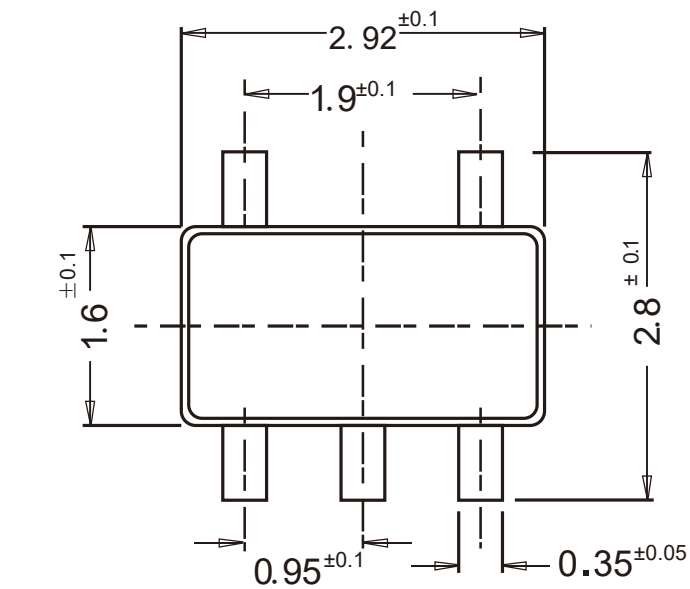


Ordering Information

Device	Package	Shipping
PJM04DP20SE	SOT-23-5	3,000PCS/Reel&7inches

Conditions of Soldering and Storage

◆ Recommended condition of reflow soldering

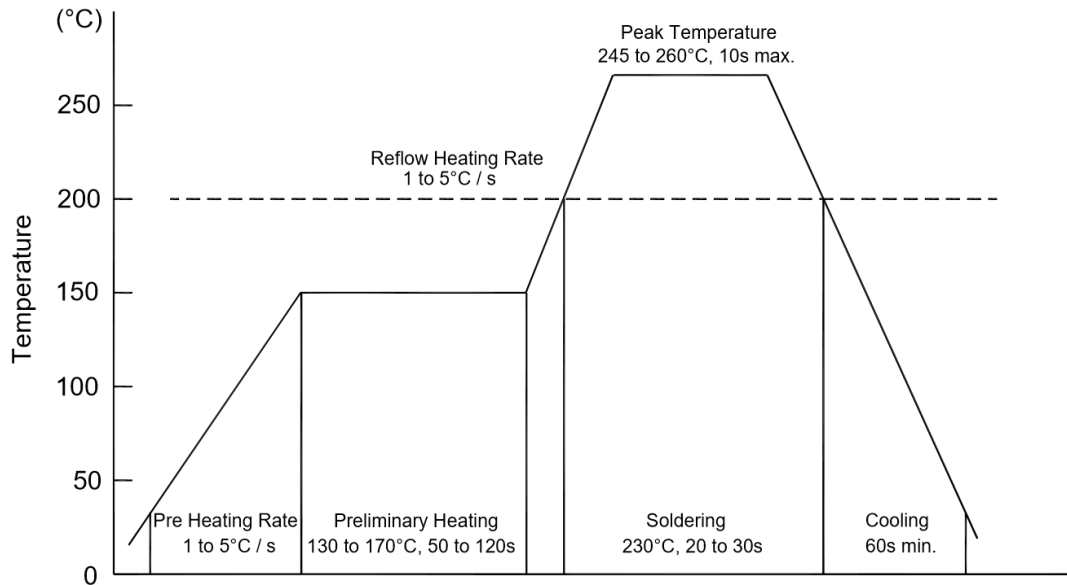

Recommended peak temperature is over 245 °C. If peak temperature is below 245 °C, you may adjust the following parameters:

- Time length of peak temperature (longer)
- Time length of soldering (longer)
- Thickness of solder paste (thicker)

◆ Conditions of hand soldering


- Temperature: 370 °C
- Time: 3s max.
- Times: one time

◆ Storage conditions


- **Temperature**
5 to 40 °C
- **Humidity**
30 to 80% RH
- **Recommended period**
One year after manufacturing

Package Specifications

- The method of packaging

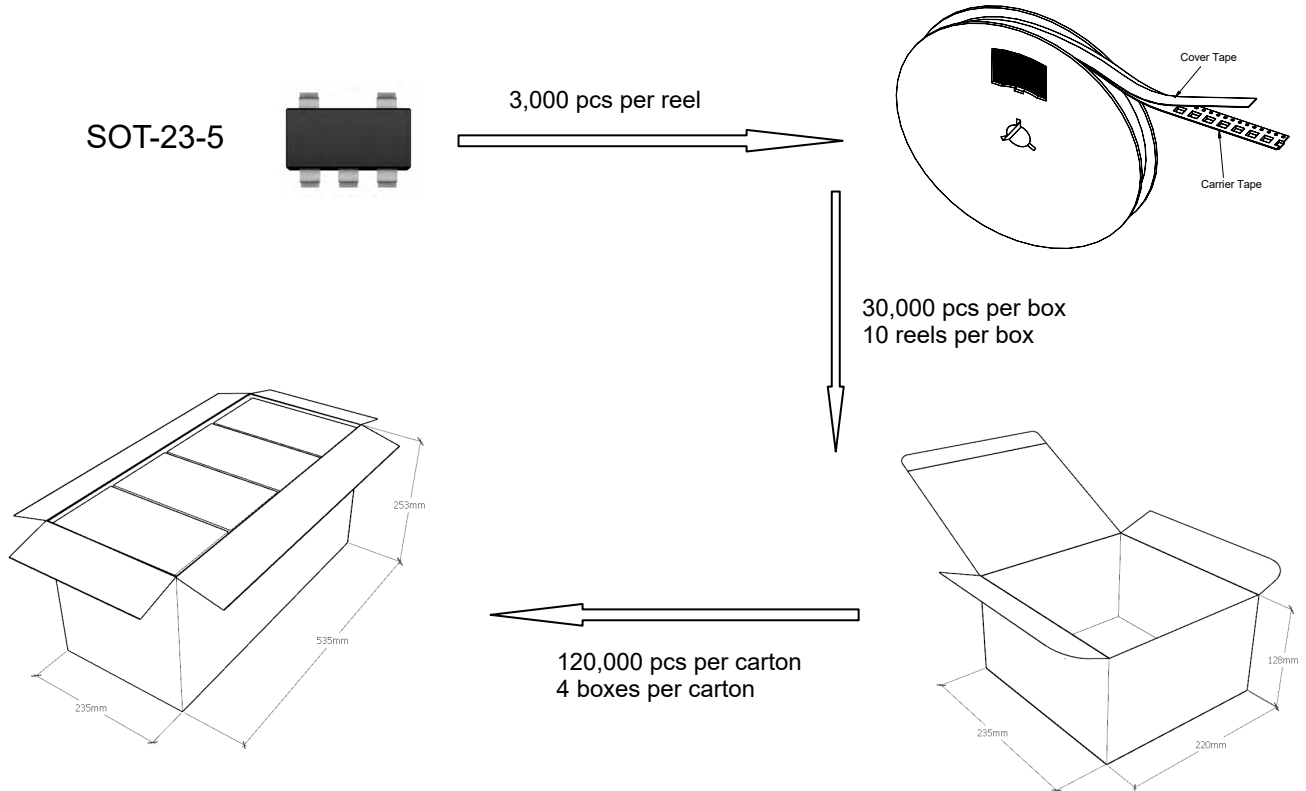

◆ Embossed tape and reel data

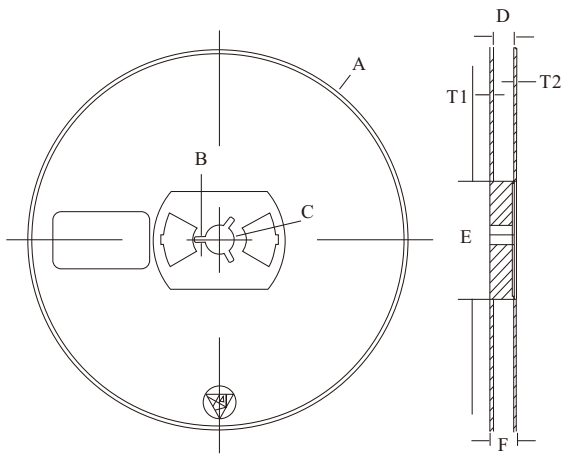

Symbol	Value (unit: mm)
A	Ø 177.8±1
B	2.7±0.2
C	Ø 13.5±0.2
E	Ø 54.5±0.2
F	12.3±0.3
D	9.6+2/-0.3
T1	1.0±0.2
T2	1.2±0.2

Reel (7")

