




PJM2035PSA

P-Channel Enhancement Mode Power MOSFET

Features

- Low gate charge and $R_{DS(on)}$
- ESD protected(HBM) up to 2KV
- $V_{DS} = -20V, I_D = -4.9A$
- $R_{DS(on)} < 35m\Omega @ V_{GS} = -4.5V$

SOT-23




1. Gate 2. Source 3. Drain

Marking Code: 2035K

Applications

- PWM applications
- Load switch
- Power management

Schematic Diagram



Absolute Maximum Ratings

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Value	Unit
Drain-Source Voltage	$-V_{DS}$	20	V
Gate-Source Voltage	V_{GS}	± 10	V
Drain Current-Continuous	$-I_D$	4.9	A
Maximum Power Dissipation	P_D	0.9	W
Junction Temperature	T_J	150	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C

Thermal Characteristics

Thermal Resistance, Junction-to-Ambient ^{Note2}	$R_{\theta JA}$	139	°C/W
--	-----------------	-----	------



PJM2035PSA

P-Channel Enhancement Mode Power MOSFET

Electrical Characteristics

(Ta=25°C unless otherwise specified¹)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	-V _{(BR)DSS}	V _{GS} =0V, I _D =-250μA	20	--	--	V
Zero Gate Voltage Drain Current	-I _{DSS}	V _{DS} =-20V, V _{GS} =0V	--	--	1	μA
Gate-Body Leakage Current	I _{GSS}	V _{GS} =±8V, V _{DS} =0V	--	--	±10	μA
Gate Threshold Voltage ^{Note3}	-V _{GS(th)}	V _{DS} =V _{GS} , I _D =-250μA	0.4	0.7	1	V
Drain-Source On-Resistance ^{Note3}	R _{DS(on)}	V _{GS} =-4.5V, I _D =-4A	--	--	35	mΩ
		V _{GS} =-2.5V, I _D =-4A	--	--	45	mΩ
		V _{GS} =-1.8V, I _D =-2A	--	--	62	mΩ
Forward Transconductance ^{Note3}	g _{FS}	V _{DS} =-5V, I _D =-4A	--	14	--	S
Dynamic Characteristics						
Input Capacitance	C _{iss}	V _{DS} =-10V, V _{GS} =0V, f=1MHz	--	1610	--	pF
Output Capacitance	C _{oss}		--	157	--	pF
Reverse Transfer Capacitance	C _{rss}		--	145	--	pF
Switching Characteristics						
Turn-on Delay Time	t _{d(on)}	V _{DS} =-10V, I _D =-1A, V _{GS} =-4.5V, R _G =6Ω, R _L =10Ω	--	16.8	--	nS
Turn-on Rise Time	t _r		--	12.4	--	nS
Turn-off Delay Time	t _{d(off)}		--	94.1	--	nS
Turn-off Fall Time	t _f		--	42.4	--	nS
Total Gate Charge	Q _g	V _{DS} =-10V, I _D =-4A, V _{GS} =-4.5V	--	15.4	--	nC
Gate-Source Charge	Q _{gs}		--	2.5	--	nC
Gate-Drain Charge	Q _{gd}		--	3.3	--	nC
Source-Drain Diode Characteristics						
Diode Forward Voltage ^{Note3}	-V _{SD}	V _{GS} =0V, I _s =-1A	--	--	1	V
Diode Forward Current ^{Note2}	-I _s		--	--	4.9	A







Note: 1. Repetitive Rating: Pulse width limited by maximum junction temperature.

2. Surface Mounted on FR4 Board, t ≤ 10 sec.

3. Pulse Test: Pulse width≤300μs, duty cycle≤2%.



Typical Characteristic Curves

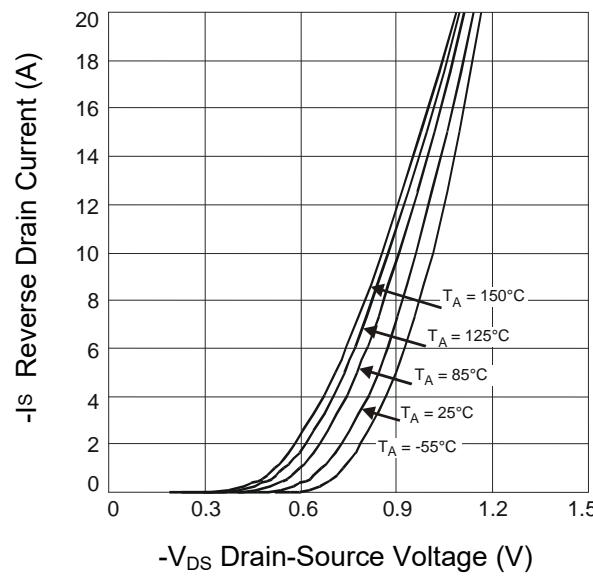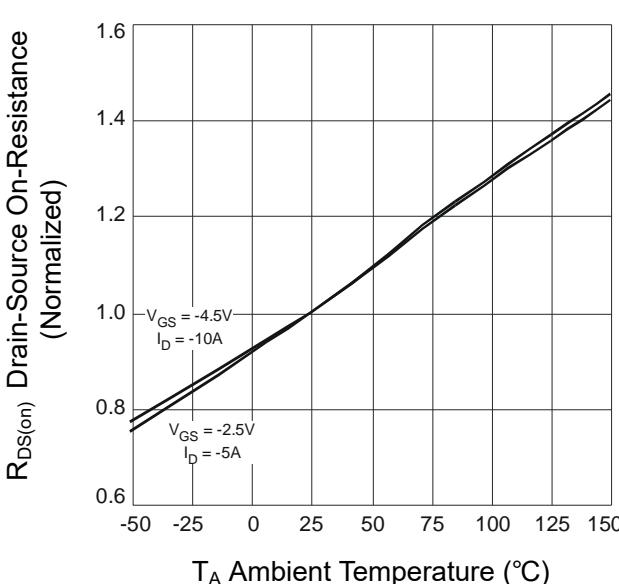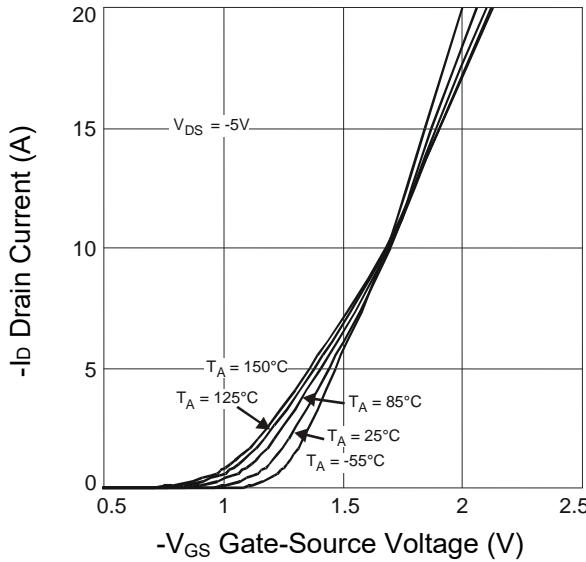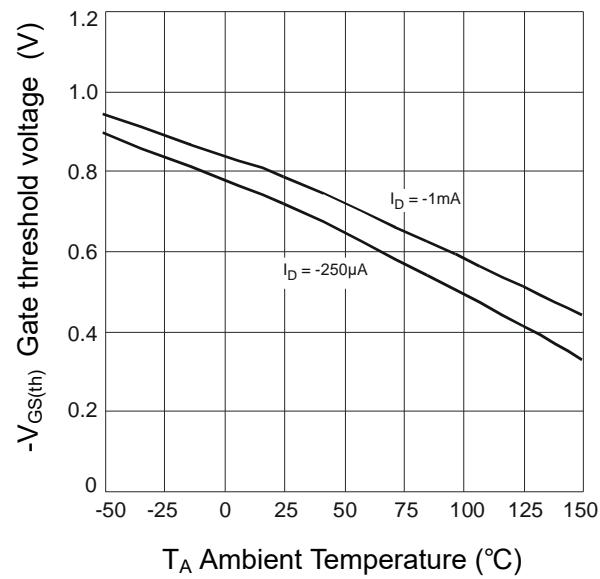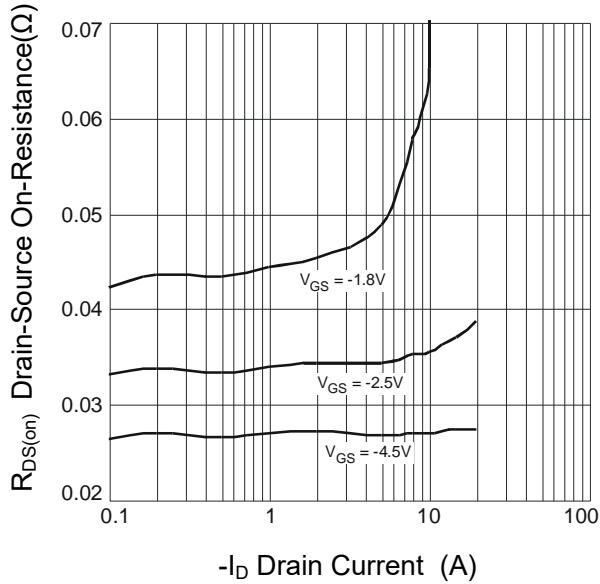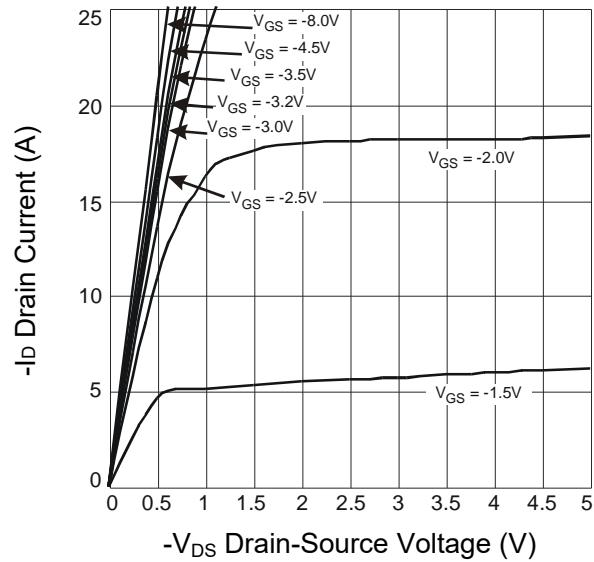




PJM2035PSA

P-Channel Enhancement Mode Power MOSFET




Package Outline

SOT-23

Dimensions in mm

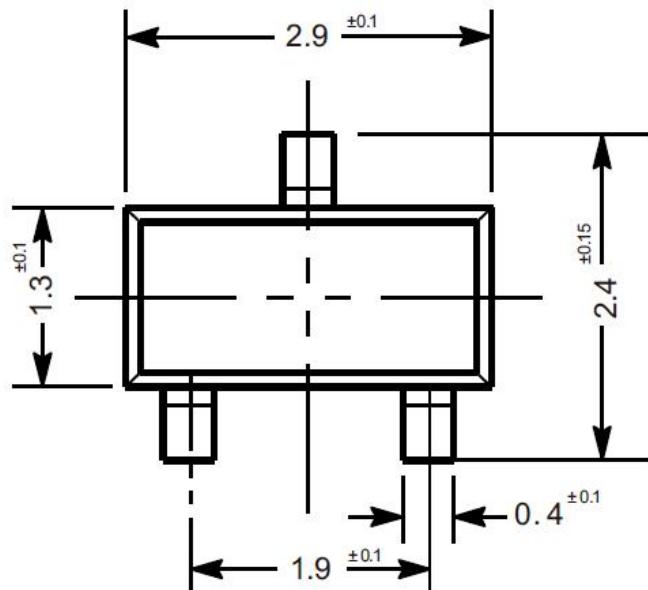

SEE VIEW

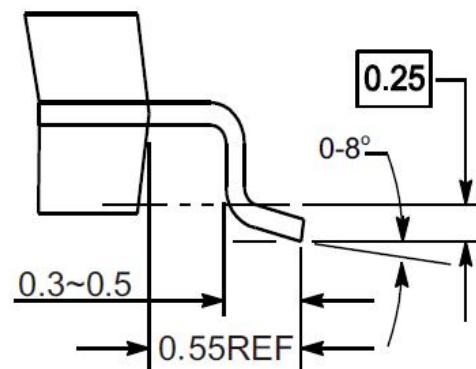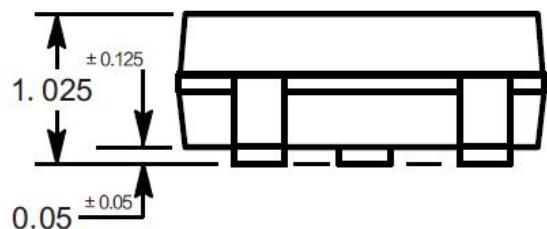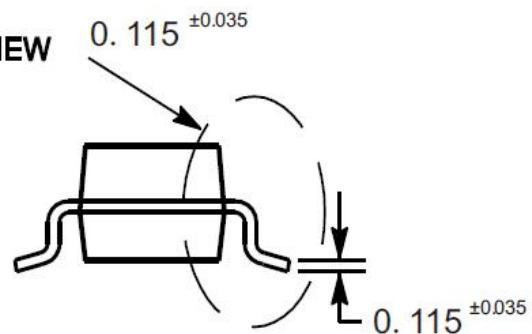

VIEW C


Ordering Information

Device	Package	Shipping
PJM2035PSA	SOT-23	3,000PCS/Reel&7inches



Conditions of Soldering and Storage

◆ Recommended condition of reflow soldering

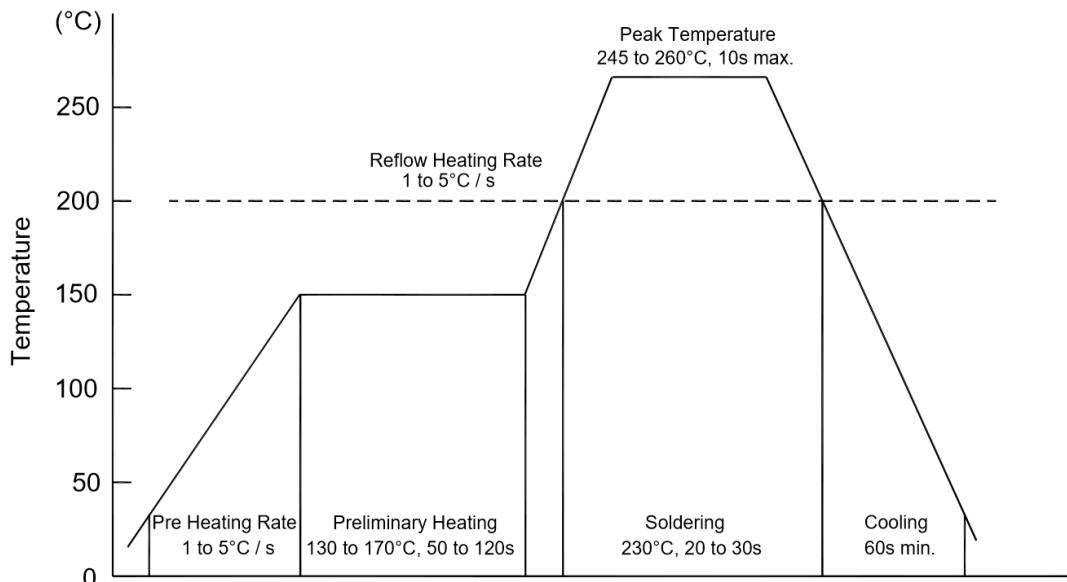

Recommended peak temperature is over 245 °C. If peak temperature is below 245 °C, you may adjust the following parameters:

- Time length of peak temperature (longer)
- Time length of soldering (longer)
- Thickness of solder paste (thicker)

◆ Conditions of hand soldering

- Temperature: 370 °C
- Time: 3s max.
- Times: one time


◆ Storage conditions

- **Temperature**
5 to 40 °C
- **Humidity**
30 to 80% RH
- **Recommended period**
One year after manufacturing




Package Specifications

- The method of packaging

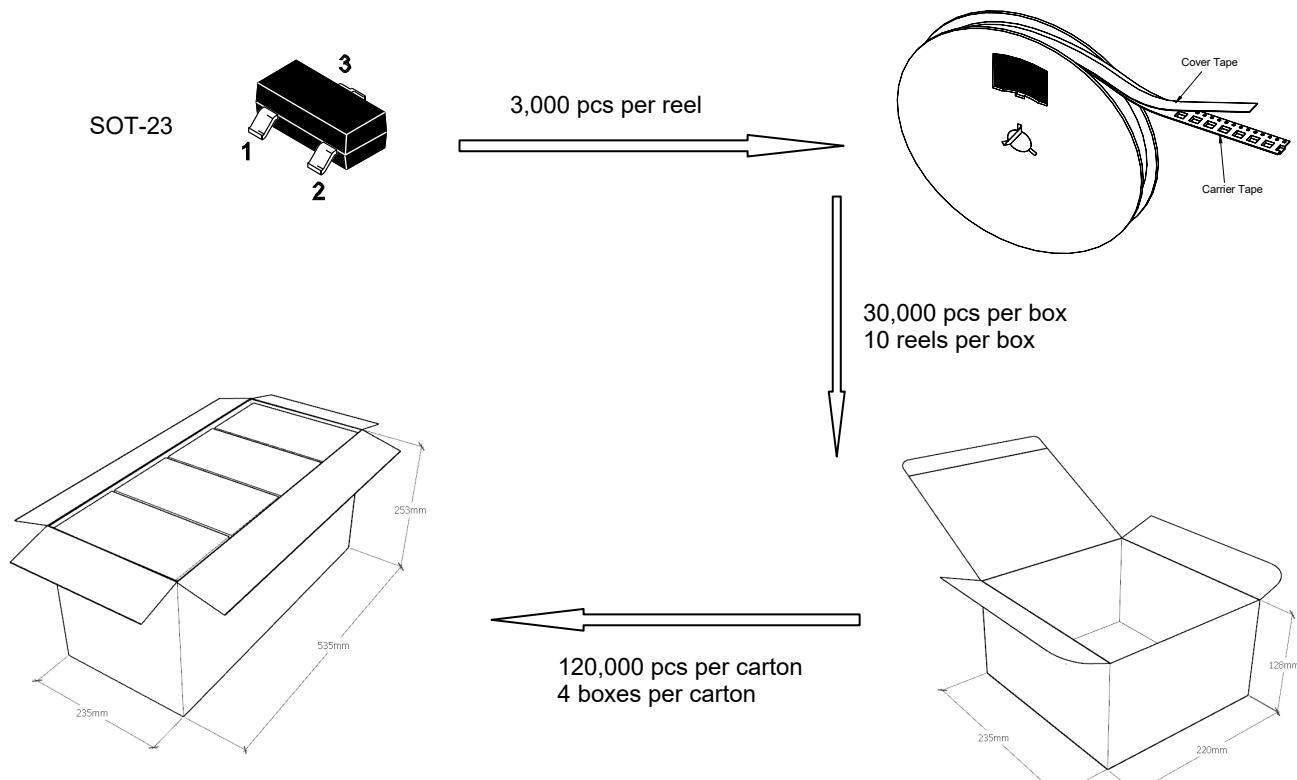

◆ Embossed tape and reel data

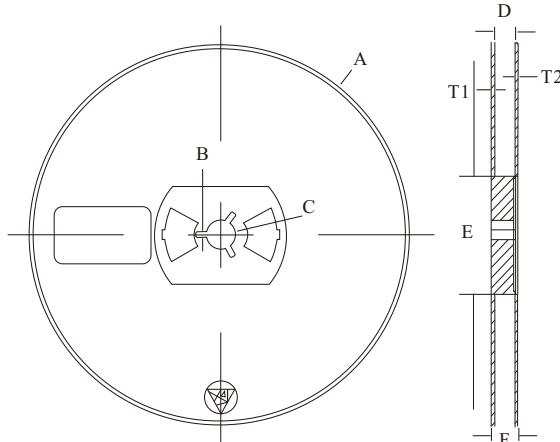

Symbol	Value (unit: mm)
A	$\varnothing 177.8 \pm 1$
B	2.7 ± 0.2
C	$\varnothing 13.5 \pm 0.2$
E	$\varnothing 54.5 \pm 0.2$
F	12.3 ± 0.3
D	$9.6 +2/-0.3$
T1	1.0 ± 0.2
T2	1.2 ± 0.2

Reel (7")

