


PJM7N02SA

N-Channel Enhancement Mode Power MOSFET

Features

- Fast switching
- Low gate charge and $R_{DS(on)}$
- Low reverse transfer capacitances
- $V_{DS} = 20V, I_D = 7A$
 $R_{DS(on)} < 26m\Omega @ V_{GS} = 10V$

SOT-23




1. Gate 2. Source 3. Drain

Marking Code: M20

Applications

- Load/Power switching
- Small portable electronics

Schematic Diagram



Absolute Maximum Ratings

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	20	V
Gate-Source Voltage	V_{GS}	± 12	V
Drain Current-Continuous	I_D	7	A
Drain Current-Pulsed ^{Note1}	I_{DM}	30	A
Lead Temperature for Soldering Purposes(1/8" from case for 10 s)	T_L	260	°C
Operating Junction Temperature	T_J	150	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C

Thermal Characteristics

Thermal Resistance, Junction-to-Ambient ^{Note2}	$R_{\theta JA}$	104	°C/W
--	-----------------	-----	------



PJM7N02SA

N-Channel Enhancement Mode Power MOSFET

Electrical Characteristics

(Ta=25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS}=0V, I_D=250\mu A$	20	--	--	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=16V, V_{GS}=0V$	--	--	1.0	μA
Gate-Body Leakage Current	I_{GSS}	$V_{GS}=\pm 12V, V_{DS}=0V$	--	--	± 100	nA
Gate Threshold Voltage ^{Note3}	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	0.4	--	1.0	V
Drain-to-source On-resistance ^{Note3}	$R_{DS(on)}$	$V_{GS}=10V, I_D=7A$	--	--	26	m Ω
		$V_{GS}=4.5V, I_D=6.6A$	--	--	27	m Ω
		$V_{GS}=3.8V, I_D=6A$	--	--	30	m Ω
		$V_{GS}=2.5V, I_D=5.5A$	--	--	33	m Ω
		$V_{GS}=1.8V, I_D=5A$	--	--	45	m Ω
Forward Transconductance	g_{FS}	$V_{DS}=5V, I_D=7A$	9	--	--	S
Dynamic Characteristics						
Input Capacitance	C_{iss}	$V_{DS}=10V, V_{GS}=0V, f=1MHz$	--	1150	--	pF
Output Capacitance	C_{oss}		--	185	--	pF
Reverse Transfer Capacitance	C_{rss}		--	145	--	pF
Switching Characteristics						
Turn-on Delay Time	$t_{d(on)}$	$V_{GS}=5V, V_{DD}=10V,$ $R_L=1.35\Omega, R_{GEN}=3\Omega,$	--	6	--	nS
Turn-on Rise Time	t_r		--	13	--	nS
Turn-off Delay Time	$t_{d(off)}$		--	52	--	nS
Turn-off Fall Time	t_f		--	16	--	nS
Total Gate Charge	Q_g	$V_{DD}=10V, I_D=7A, V_{GS}=4.5V$	--	15	--	nC
Gate-Source Charge	Q_{gs}		--	0.8	--	nC
Gate-Drain Charge	Q_{gd}		--	3.2	--	nC
Source-Drain Diode Characteristics						
Diode Forward Voltage ^{Note3}	V_{SD}	$V_{GS}=0V, I_S=1A$	--	--	1.0	V
Diode Forward Current ^{Note2}	I_S		--	--	7	A

Note: 1. Repetitive Rating: Pulse width limited by maximum junction temperature.

2. Surface Mounted on FR4 Board, $t \leq 10$ sec.







3. Pulse Test: Pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.



PJM7N02SA

N-Channel Enhancement Mode Power MOSFET

Typical Characteristic Curves

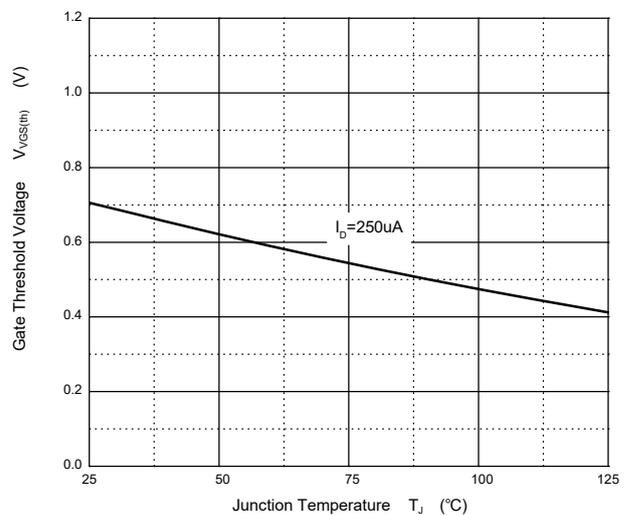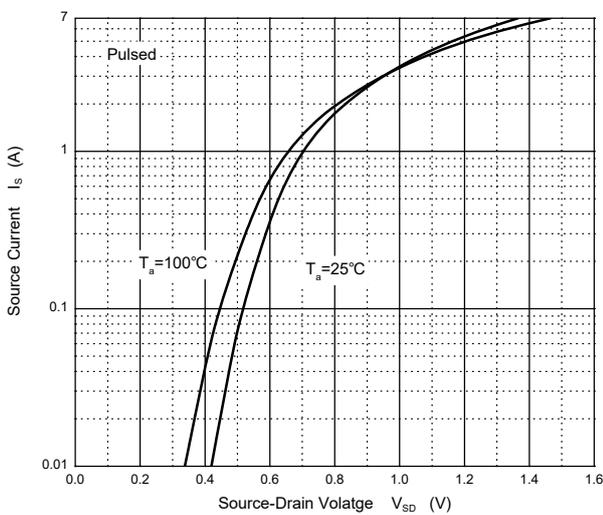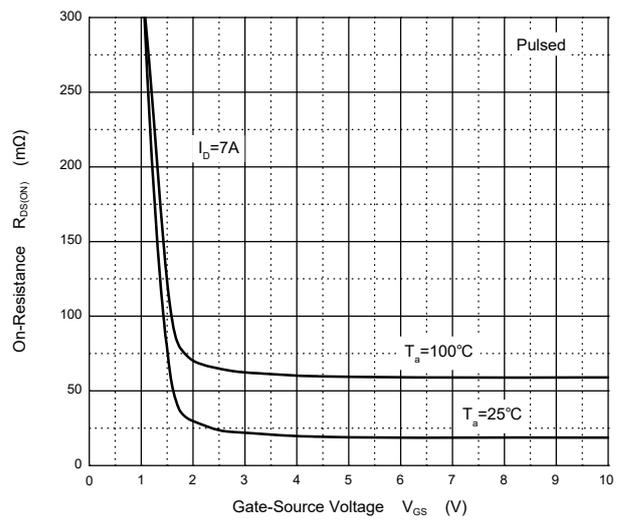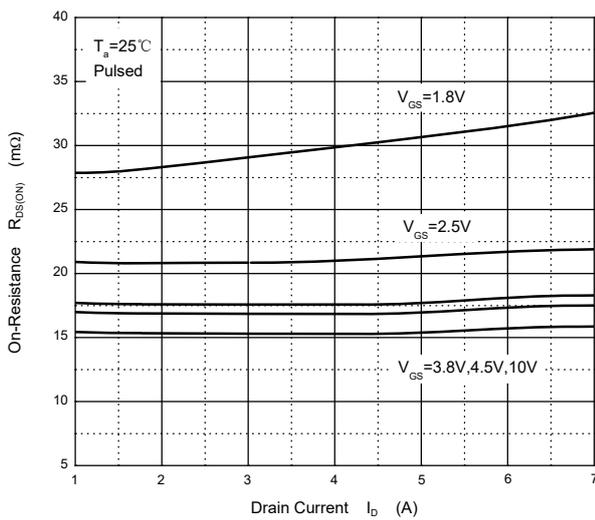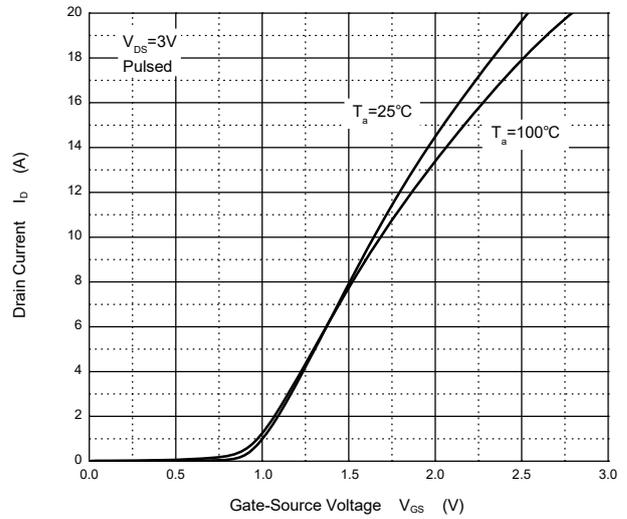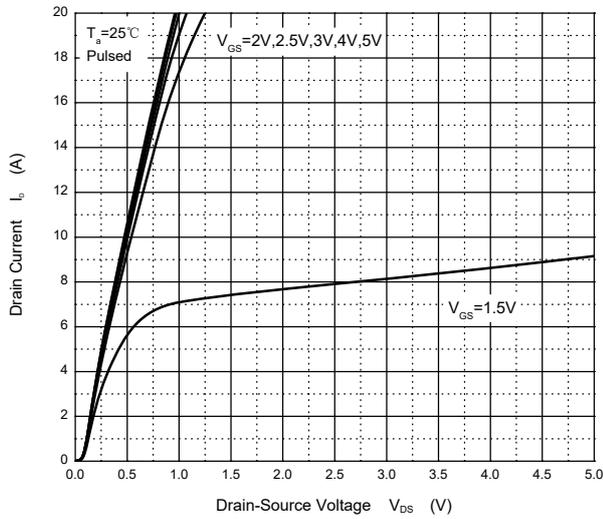




PJM7N02SA

N-Channel Enhancement Mode Power MOSFET

Package Outline


SOT-23

Dimensions in mm

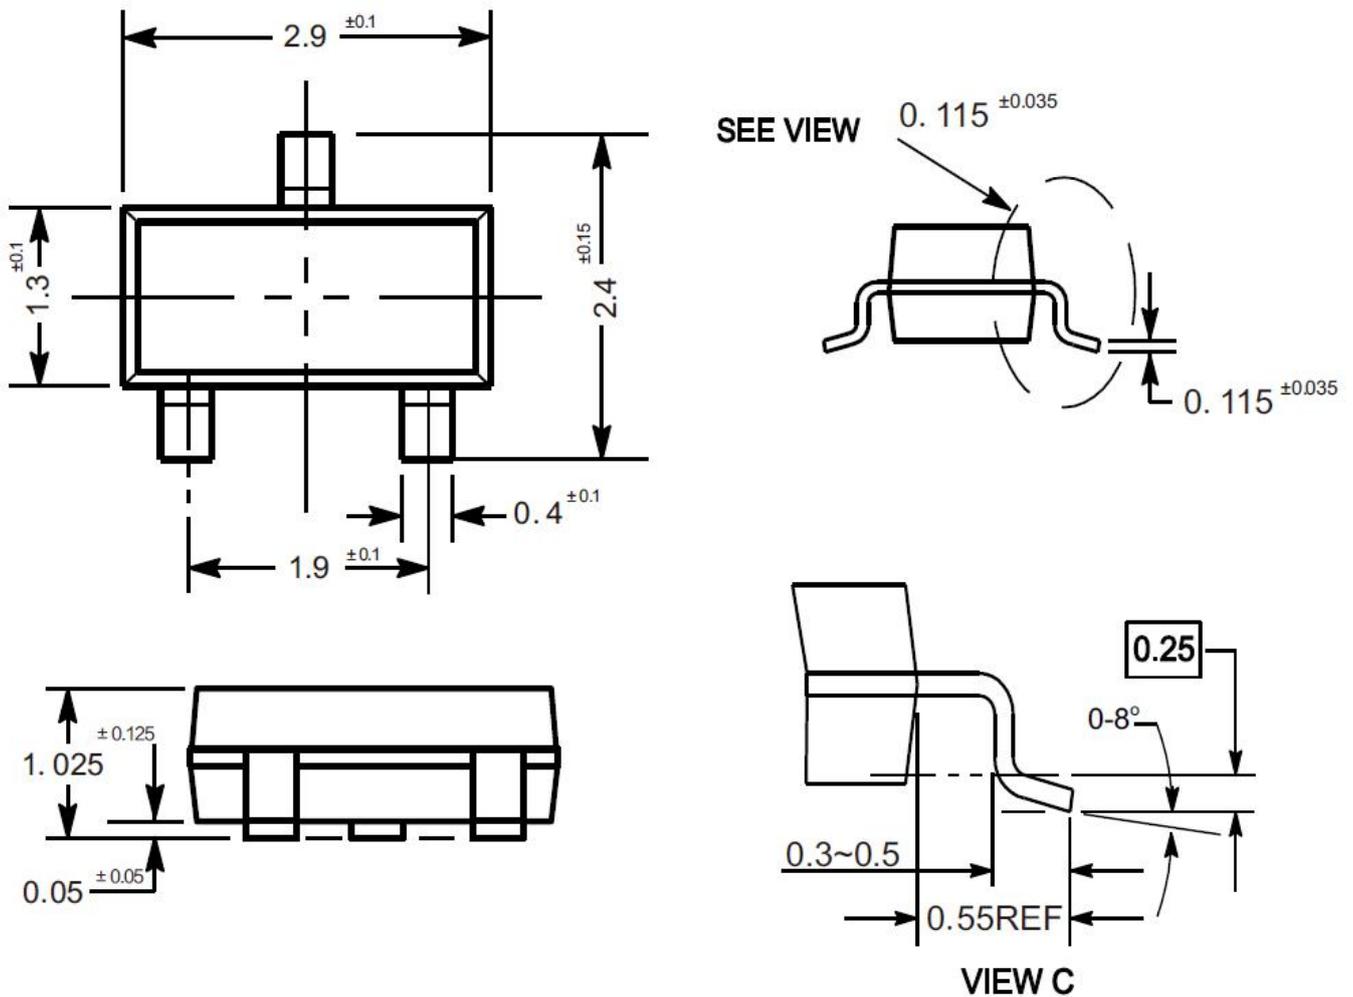


Ordering Information

Device	Package	Shipping
PJM7N02SA	SOT-23	3,000PCS/Reel&7inches



Conditions of Soldering and Storage

◆ Recommended condition of reflow soldering

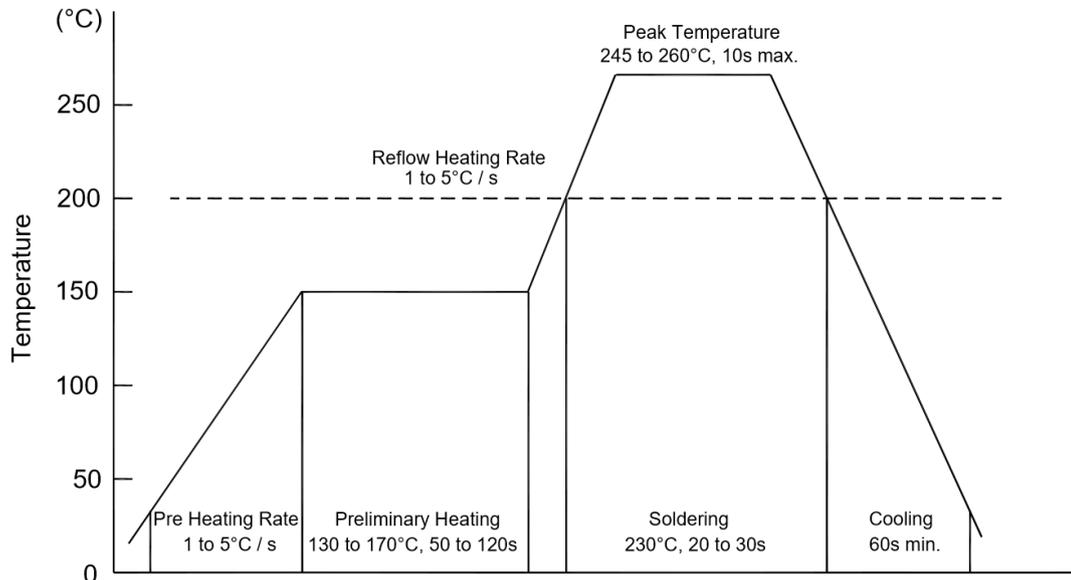

Recommended peak temperature is over 245 °C. If peak temperature is below 245 °C, you may adjust the following parameters:

- Time length of peak temperature (longer)
- Time length of soldering (longer)
- Thickness of solder paste (thicker)

◆ Conditions of hand soldering


- Temperature: 370 °C
- Time: 3s max.
- Times: one time

◆ Storage conditions


- **Temperature**
5 to 40 °C
- **Humidity**
30 to 80% RH
- **Recommended period**
One year after manufacturing

Package Specifications

- The method of packaging

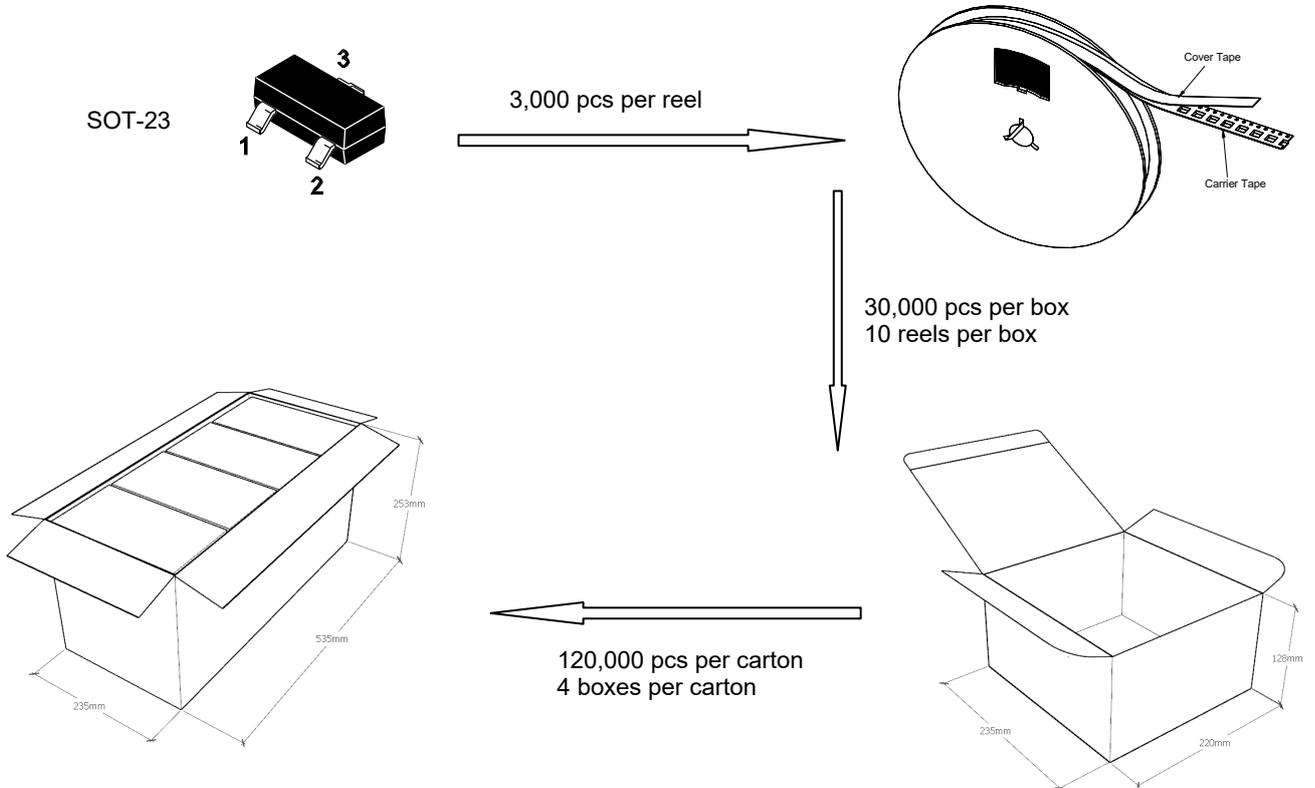

◆ Embossed tape and reel data

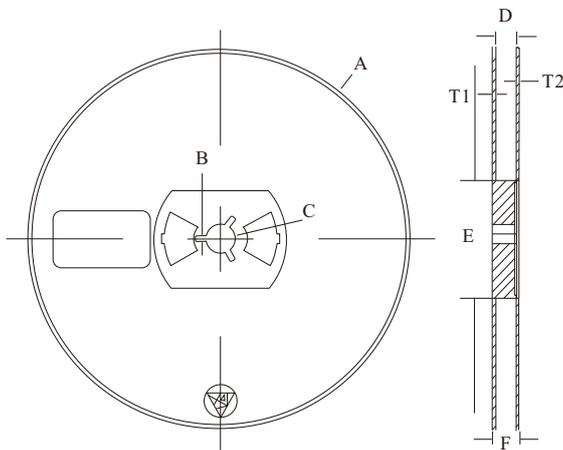

Symbol	Value (unit: mm)
A	Ø 177.8±1
B	2.7±0.2
C	Ø 13.5±0.2
E	Ø 54.5±0.2
F	12.3±0.3
D	9.6+2/-0.3
T1	1.0±0.2
T2	1.2±0.2

Reel (7")

