




SB22FL~SB220FL Schottky Barrier Diodes

Features

- For surface mount applications
- High forward surge current capability
- Low power loss, high efficiency

SOD-123FL



1.Cathode  2.Anode

Marking Code :

SB22FL : S22
SB24FL : S24
SB26FL : S26
SB28FL : S28
SB210FL : S210
SB212FL : S212
SB215FL : S215
SB220FL : S220

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	SB22FL	SB24FL	SB26FL	SB28FL	SB210FL	SB212FL	SB215FL	SB220FL	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	40	60	80	100	120	150	200	V
Maximum RMS Voltage	V_{RMS}	14	28	42	56	70	84	105	140	V
Maximum DC Blocking Voltage	V_{DC}	20	40	60	80	100	120	150	200	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	2.0								A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	50				40				A
Maximum Instantaneous Forward Voltage at 2 A	V_F	0.55	0.70		0.85	0.95				V
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_A = 25\text{ }^\circ\text{C}$ $T_A = 100\text{ }^\circ\text{C}$	I_R	0.5 5				0.3 3				mA
Typical Junction Capacitance ^{Note1}	C_j	220	80						pF	
Typical Thermal Resistance ^{Note2}	$R_{\theta JA}$	85								$^\circ\text{C/W}$
Operating Junction Temperature Range	T_J	-55 to +150								$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150								$^\circ\text{C}$







Note:

1. Measured at 1 MHz and applied reverse voltage of 4 V D.C
2. P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.



SB22FL~SB220FL Schottky Barrier Diodes

Typical Characteristic Curves

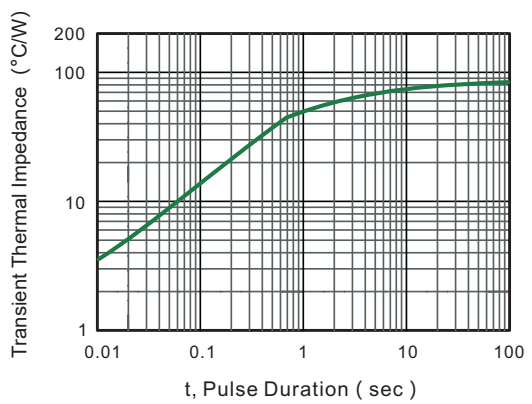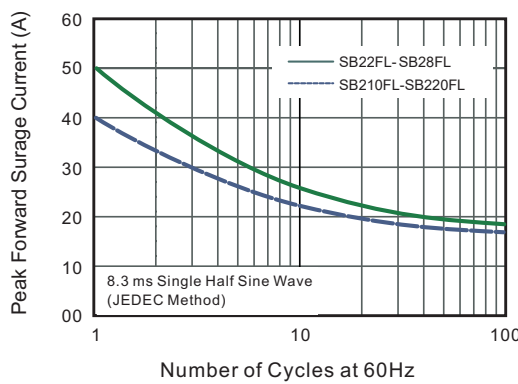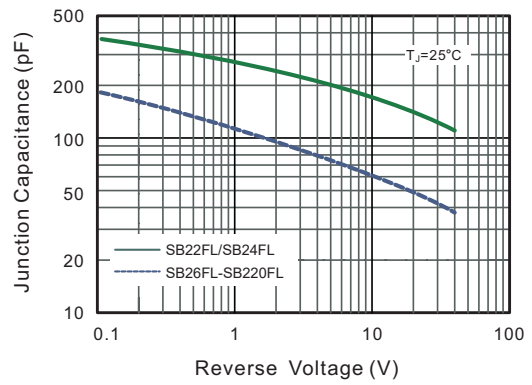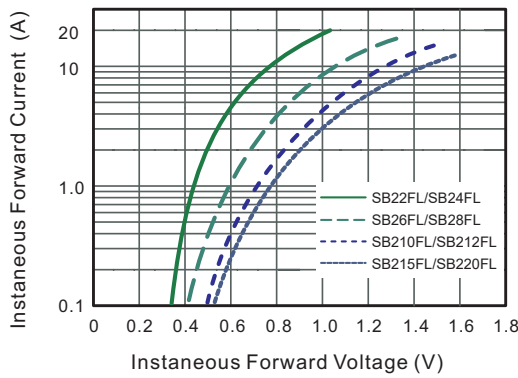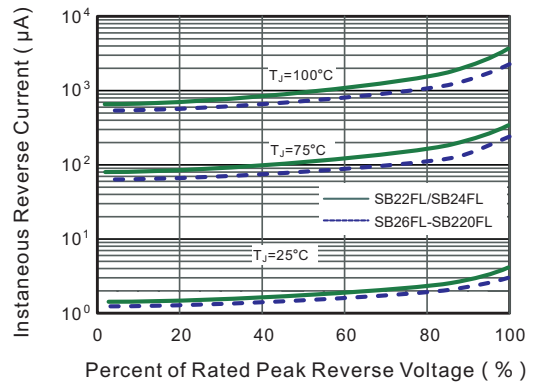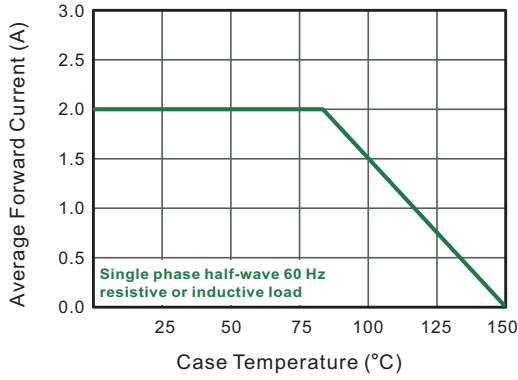




SB22FL~SB220FL Schottky Barrier Diodes

Package Outline

SOD-123FL

Dimensions in mm

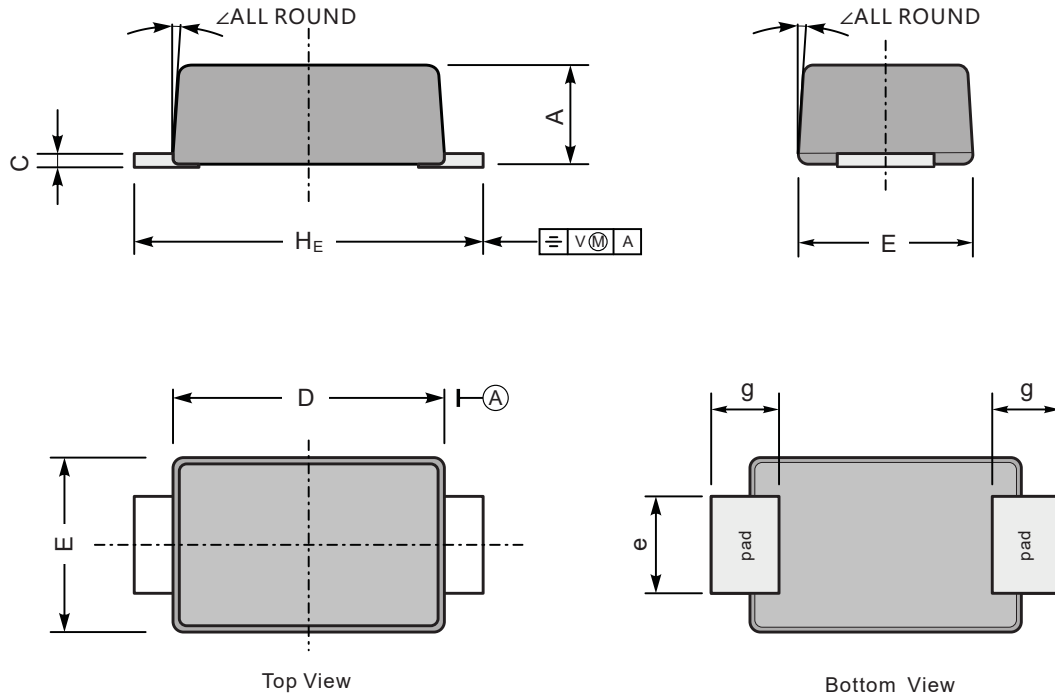

UNIT		A	C	D	E	e	g	HE	∠
mm	max	1.1	0.20	2.9	1.9	1.1	0.9	3.8	7°
	min	0.9	0.12	2.6	1.7	0.8	0.7	3.5	
mil	max	43	7.9	114	75	43	35	150	
	min	35	4.7	102	67	31	28	138	