



SS52-PJ~SS520-PJ Schottky Barrier Rectifiers

Features

- For surface mount applications
- High forward surge current capability
- Low profile package
- Low power loss, high efficiency
- Metal silicon junction, majority carriers conduction

GA5



Marking Code :

SS52-PJ: SS52
 SS54-PJ: SS54
 SS56-PJ: SS56
 SS58-PJ: SS58
 SS510-PJ: SS510
 SS512-PJ: SS512
 SS515-PJ: SS515
 SS520-PJ: SS520

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbol	SS52 -PJ	SS54 -PJ	SS56 -PJ	SS58 -PJ	SS510 -PJ	SS512 -PJ	SS515 -PJ	SS520 -PJ	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	40	60	80	100	120	150	200	V
Maximum RMS Voltage	V_{RMS}	14	28	42	56	70	84	105	140	V
Maximum DC Blocking Voltage	V_{DC}	20	40	60	80	100	120	150	200	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	5.0								A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	120								A
Maximum Instantaneous Forward Voltage at 5 A	V_F	0.55	0.70	0.85						V
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_A = 25\text{ }^\circ\text{C}$ $T_A = 100\text{ }^\circ\text{C}$	I_R	1.0 50								mA
Typical Junction Capacitance ^{Note1}	C_j	500	300							pF
Typical Thermal Resistance ^{Note2}	$R_{\theta JA}$	60								$^\circ\text{C/W}$
Operating Junction Temperature Range	T_J	-55 to +125								$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150								$^\circ\text{C}$







Note:

1. Measured at 1 MHz and applied reverse voltage of 4 V DC.
2. P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.



SS52-PJ~SS520-PJ Schottky Barrier Rectifiers

Typical Characteristic Curves

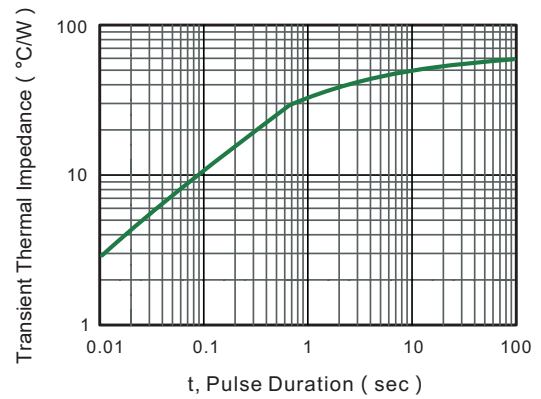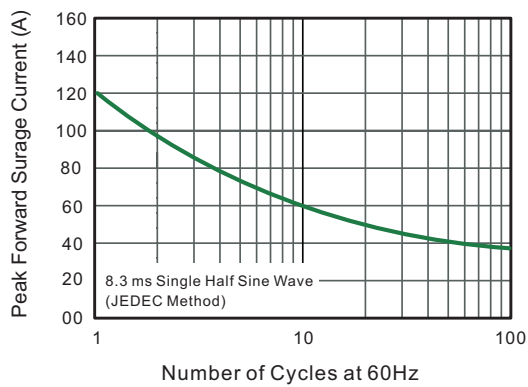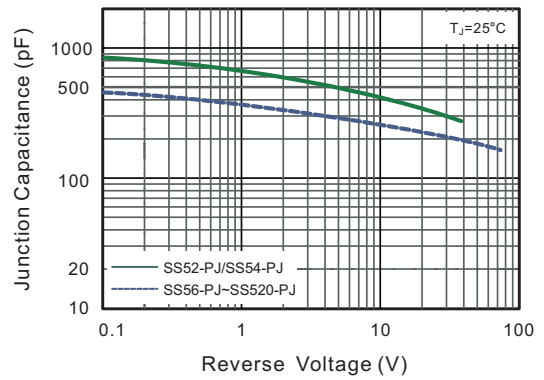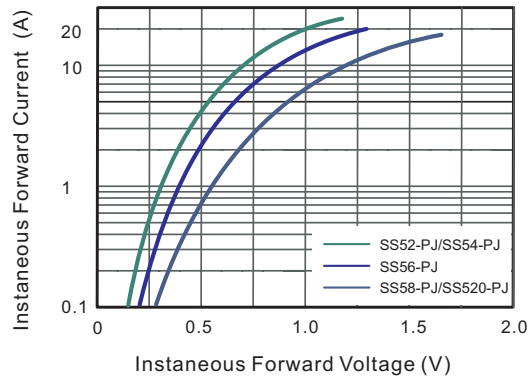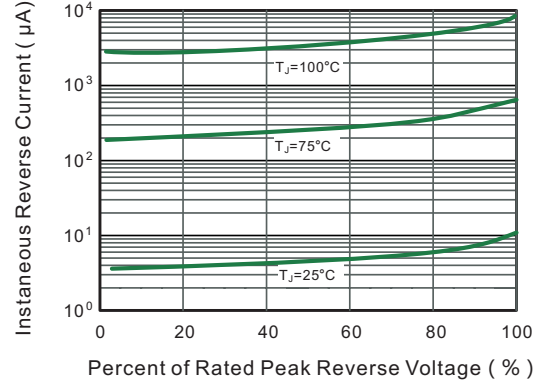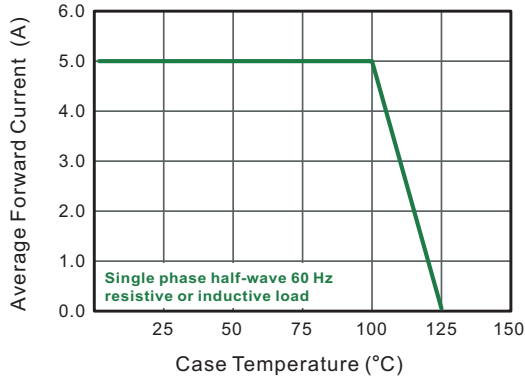




SS52-PJ~SS520-PJ Schottky Barrier Rectifiers

Package Outline

SMA

Dimensions in mm

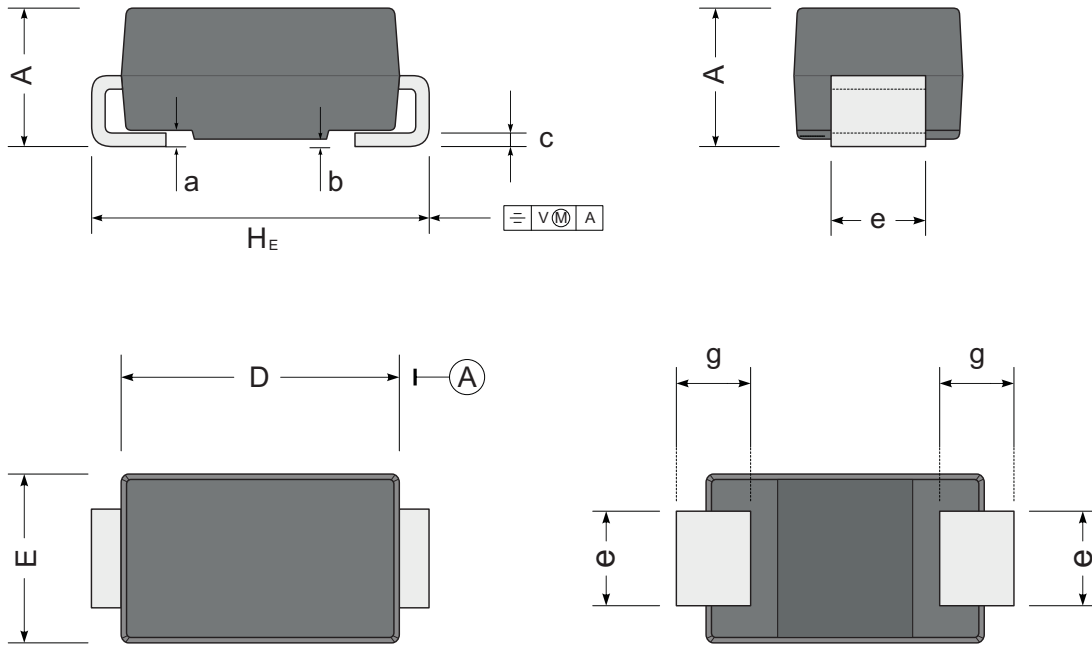

UNIT		A	D	E	H _E	c	e	g	b	a
mm	max	2.2	4.5	2.7	5.2	0.31	1.6	1.5	0.2	0.3
	min	1.9	4.0	2.3	4.7	0.15	1.3	0.9	0.05	
mil	max	87	181	106	205	12	63	59	7.9	12
	min	75	157	91	185	6	51	35	2	